





L X series overwrappers



overwrapping technology

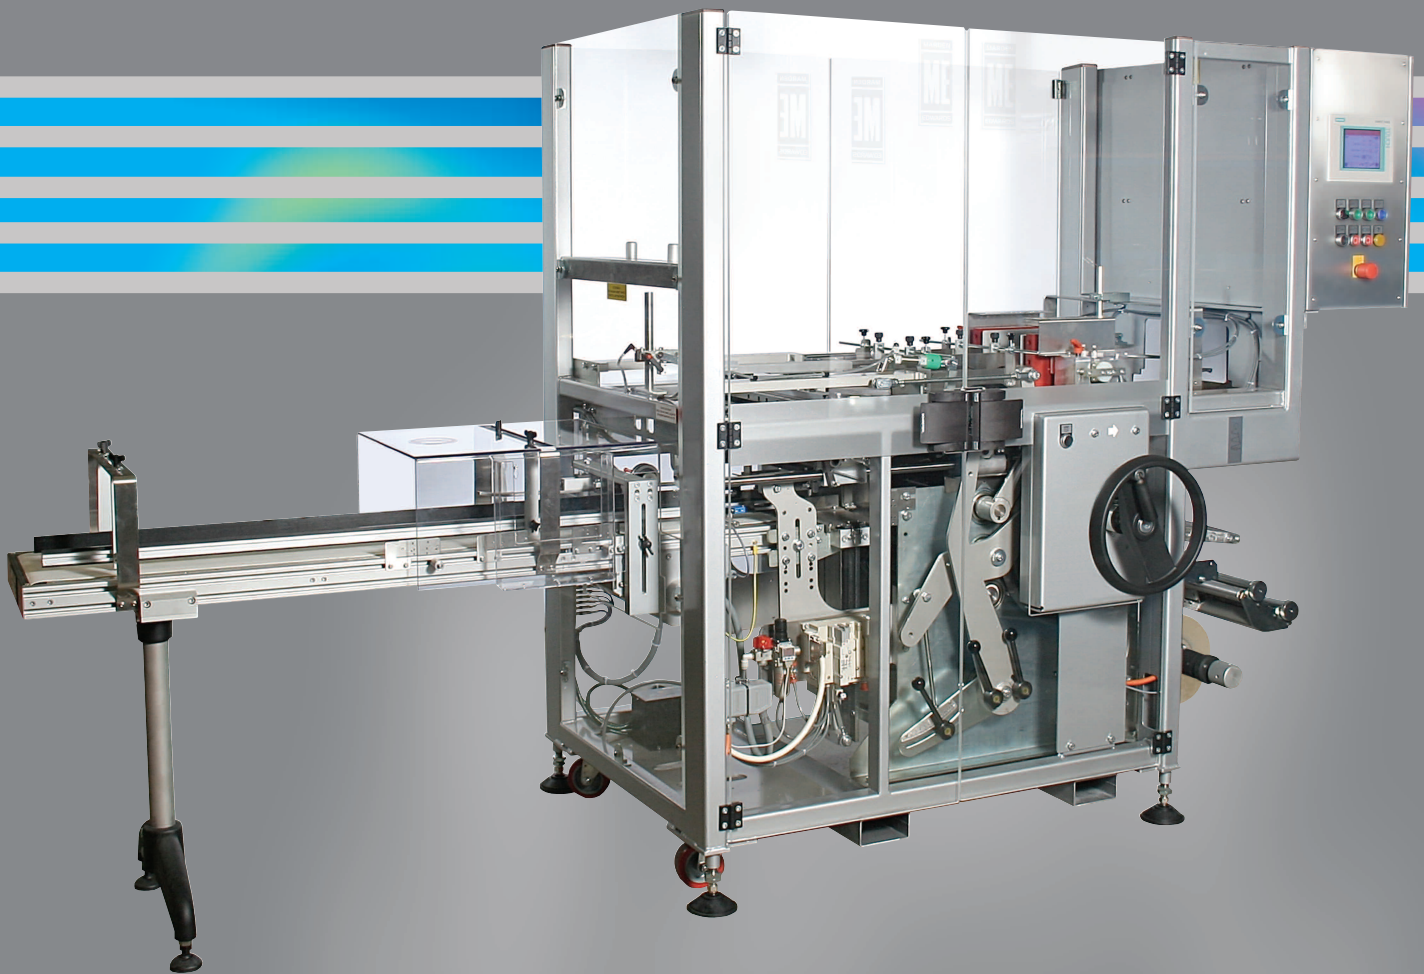


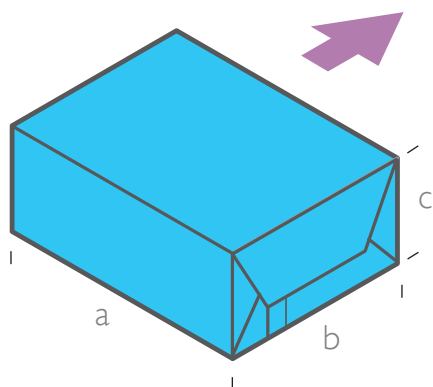

model:	LX series	LX series wide	LXH series
speed:	70 overwraps per minute*	40 overwraps per minute*	90 overwraps per minute*
'a' pack length:	50-305mm	50-450mm	50-305mm
'b' pack width:	25-250mm	55-300mm	25-150mm
'c' pack height:	10-150mm	10-150mm	10-70mm

* maximum for this series, output speed depends on pack size.
several models, speeds and pack size capabilities are available.

L X s e r i e s o v e r w r a p p e r s

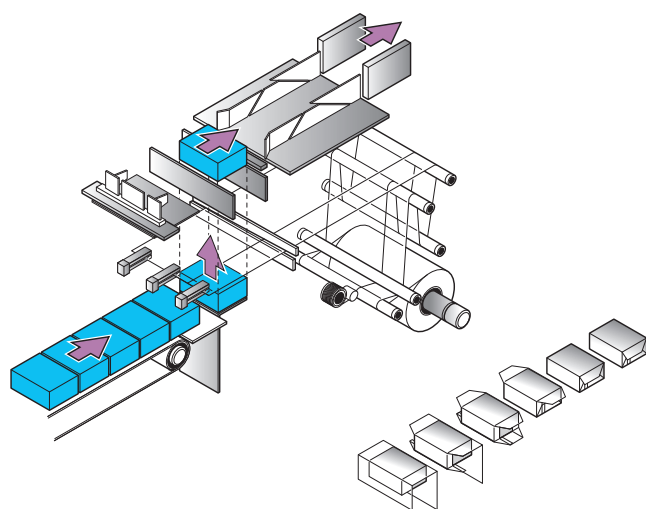

standard fitments include:
Beckhoff plc & colour hmi
mechanical gripper film pull system
simple operation and maintenance
large pack size capability
external side loading film reel, expanding mandrel type
splice deck
quick release size change over via change parts

optional fitments include:
tear tape applicator
print registration facility
flock finish on pack contact parts
profiled end sealer pads
cosmetic quality spot or bar on end seal profiles
size change over via change parts
Allen Bradley or Siemens control system
automatic product collator
front feed or side feed conveyor
twin blade film slitter
auto-splice facility

all LX series overwrappers comply with international safety standards,
are supplied fully guarded and **CE marked**.

for further information:
tel: +44 (0)1202 861200
fax: +44 (0)1202 861400
email: info@mardenedwards.com
www.mardenedwards.com

Marden Edwards Limited 2 nimrod way, ferndown industrial estate,
wimborne, dorset BH21 7SH uk

Marden Edwards reserves the right to change any details without prior notice.

