




# SEMI-AUTO series overwrapper



overwrapping technology



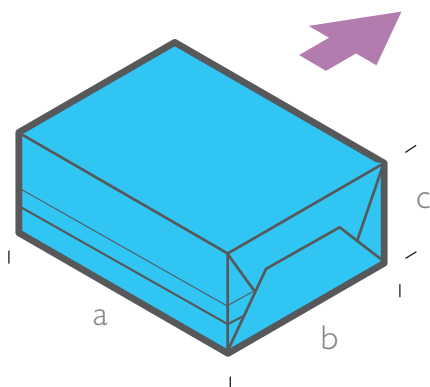

model: semi-auto

speed: 10 overwraps per minute maximum


'a' pack length: 40 - 300mm

'b' pack width: 40 - 200mm

'c' pack height: 25 - 100mm

output speed depends on pack size and operator  
other models, speeds and pack size capabilities available.

## SEMI-AUTO series overwrapper

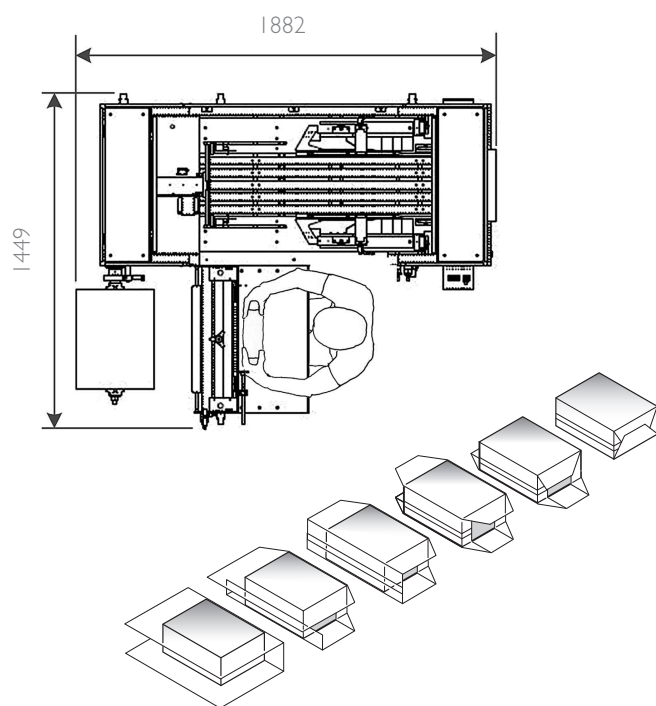


all semi-auto overwrappers comply with international safety standards,  
are supplied fully guarded and **CE marked**.

standard fitments include:

- inverter driven film feed, adjustable via digital controller
- inverter driven transfer pusher
- external side loading film reel
- no change parts
- fully adjustable, simple and fast size changeover
- flock finish on pack contact parts
- individual pack transportation through folding deck and end sealers
- single phase electrics
- no pneumatics

optional fitments include:

- tear tape applicator
- dual film slitter with powered waste take-up
- cosmetic quality spot or bar end seal profiles

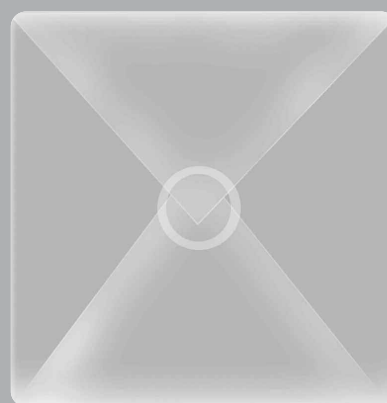

optional cosmetic  
quality spot seal

for further information:

tel: +44 (0)1202 861200

fax: +44 (0)1202 861400

email: [info@mardenedwards.com](mailto:info@mardenedwards.com)

[www.mardenedwards.com](http://www.mardenedwards.com)

Marden Edwards Limited 2 nimrod way, ferndown industrial estate, wimborne, dorset BH21 7SH uk

Marden Edwards reserves the right to change any details without prior notice.